

DT10750-1 SIDE PLATE

NOTES:


- 1) MATERIAL: 6061-T6/T62/T651 ALUMINUM SHEET OR PLATE
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027
OR ASTM B209
REF DART SPEC M6061T6S
- 2) FINISH: ANODIZE RED PER MIL-A-8625 TYPE II, CLASS 2
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "DT10750-1" PER DART QSI 044 SECTION 6.3
USE MAX DEPTH OF 0.010 WITH A MIN TOOL RAD OF 0.010
- 7) WEIGHT: N/A
- 8) MACHINE ENGRAVE ANGLE AND LINES PER DART QSI 044 SECTION 6.3
USE MAX DEPTH OF 0.010 WITH MIN TOOL RAD OF 0.010

RELEASED
21.08.05 ZF

APPROVED

C	ADDED -5 AND -7 -1 REVISED IDENTIFICATION AND ENGRAVING NOTES. INCREASED CUTOUT WIDTH	OS	21.04.07
B	-1 MODIFIED FINISH. REMOVED FILL ENGRAVING WITH WHITE PAINT AFTER FINISH NOTE. REMOVED BATCH NUMBER IDENTIFICATION -3 MODIFIED FINISH. REMOVED BATCH NUMBER IDENTIFICATION	KPT	20.11.03
A	NEW ISSUE	KPT	20.08.31
REV.	DESCRIPTION	BY	DATE
DESIGN	KPT	DART AEROSPACE LTD	
DRAWN	OS	HAWKESBURY, ONTARIO, CANADA	
CHECKED	JC	DRAWING NO.	REV. C
MFG. APPR.	DD	DT10750	SHEET 1 OF 4
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	N/A	ANGLED GAUGE ADAPTER POSITIONING TOOL	NTS
DATE	21.04.07	COPYRIGHT © 2020 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

8 7 6 5 4 3 2 1

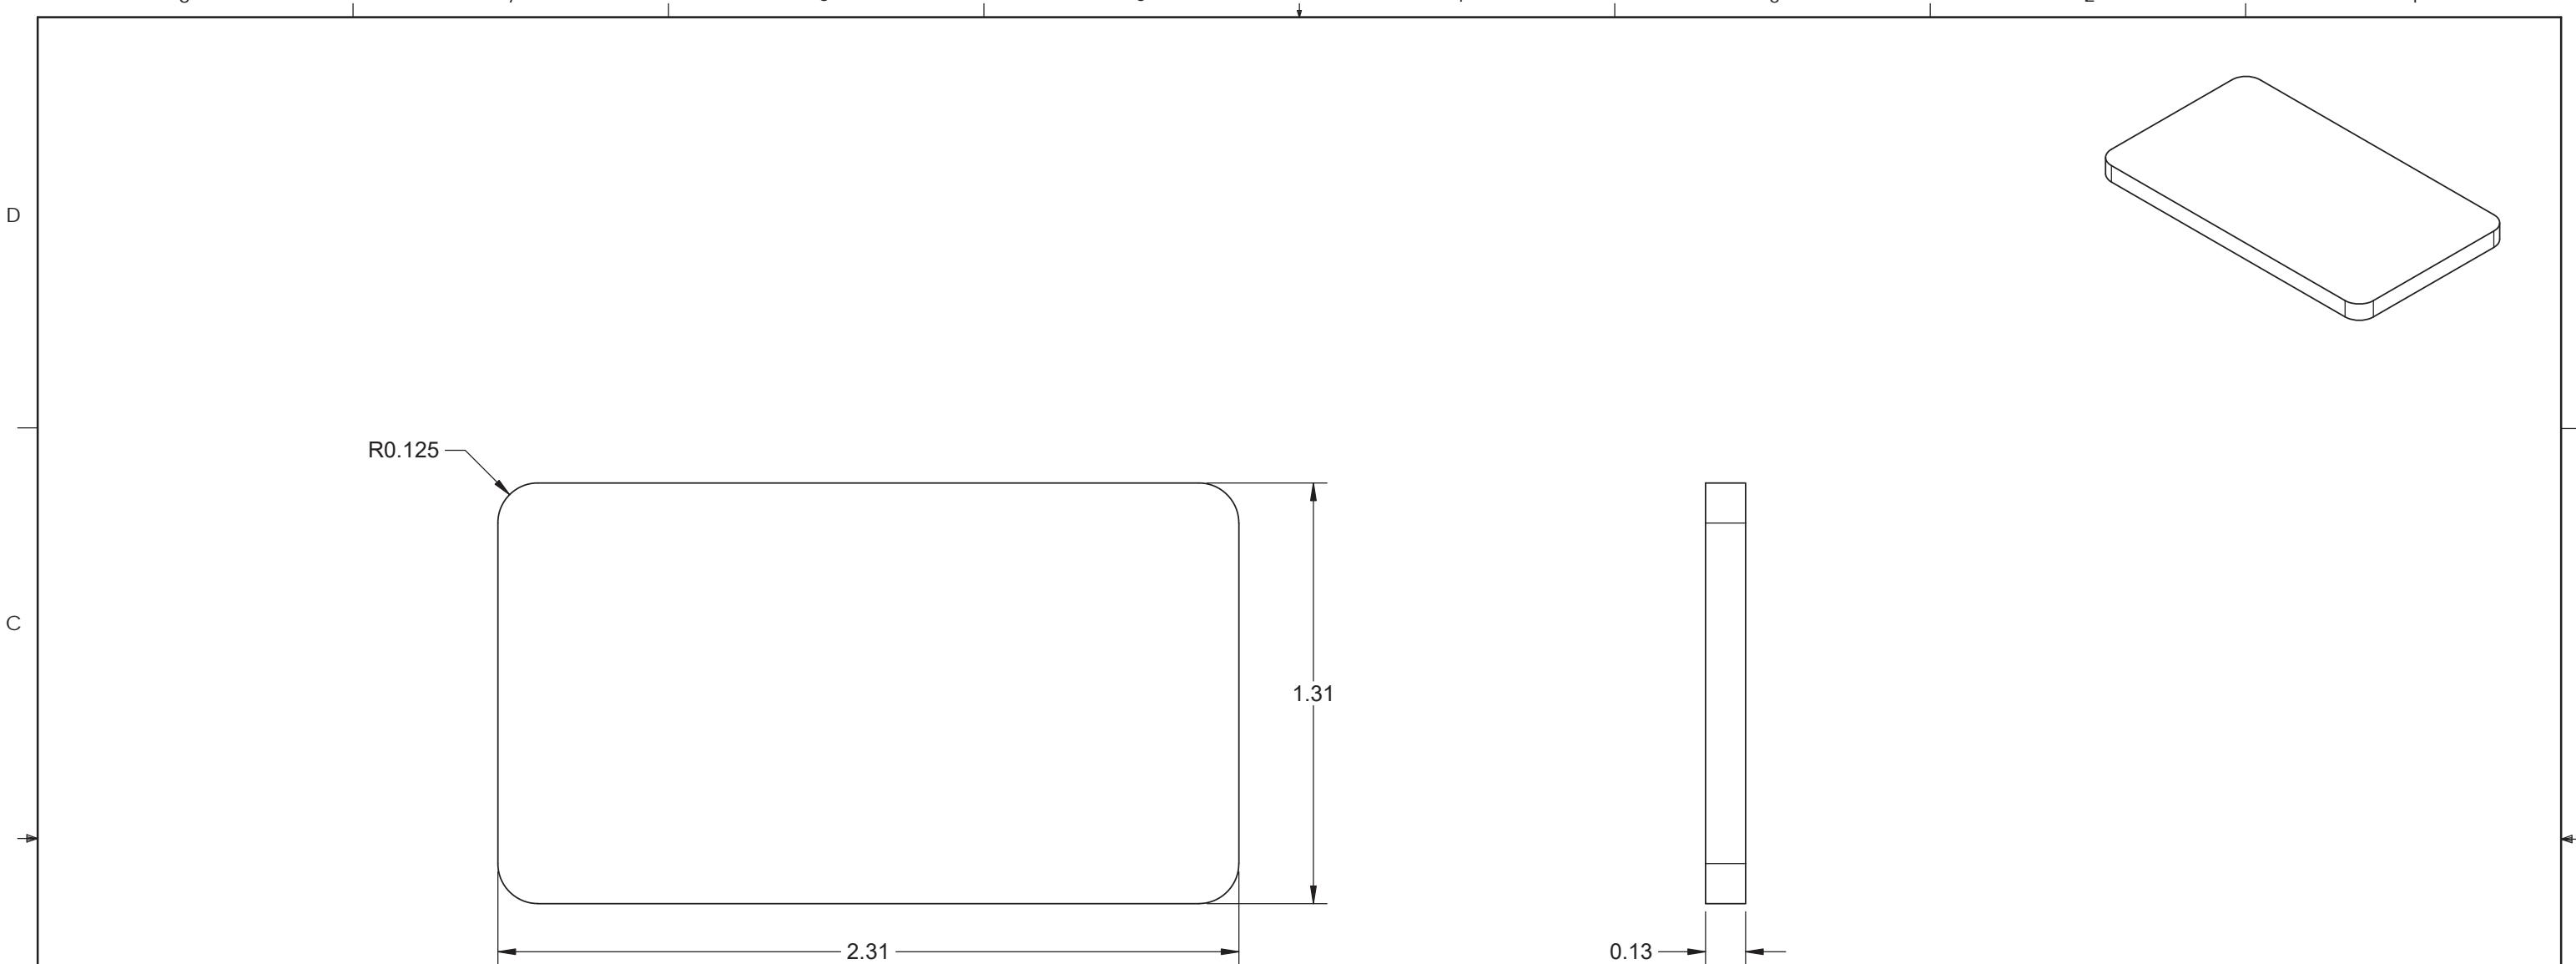

DT10750-3 TOP PLATE

NOTES:





- 1) MATERIAL: 6061-T6/T62/T651 ALUMINUM SHEET OR PLATE
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027
OR ASTM B209
REF DART SPEC M6061T6S
- 2) FINISH: ANODIZE RED PER MIL-A-8625 TYPE II, CLASS 2
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "DT10750-3" PER DART QSI 044 SECTION 6.1
- 7) WEIGHT: N/A

RELEASED
21.08.05 ZF

APPROVED

DESIGN	KPT	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA
DRAWN	OS	
CHECKED	JC	
MFG. APPR.	DD	
APPROVED	<i>[Signature]</i>	
DE APPR.	N/A	
DATE	21.04.07	

COPYRIGHT © 2020 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT
WRITTEN PERMISSION FROM DART AEROSPACE LTD.

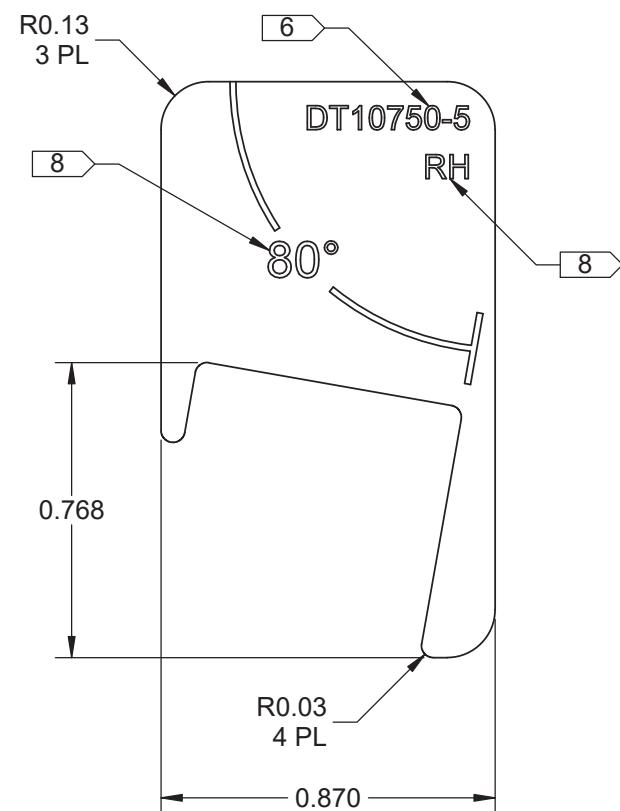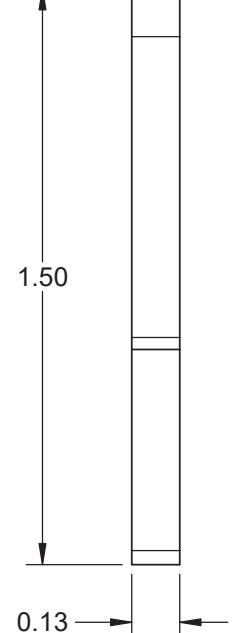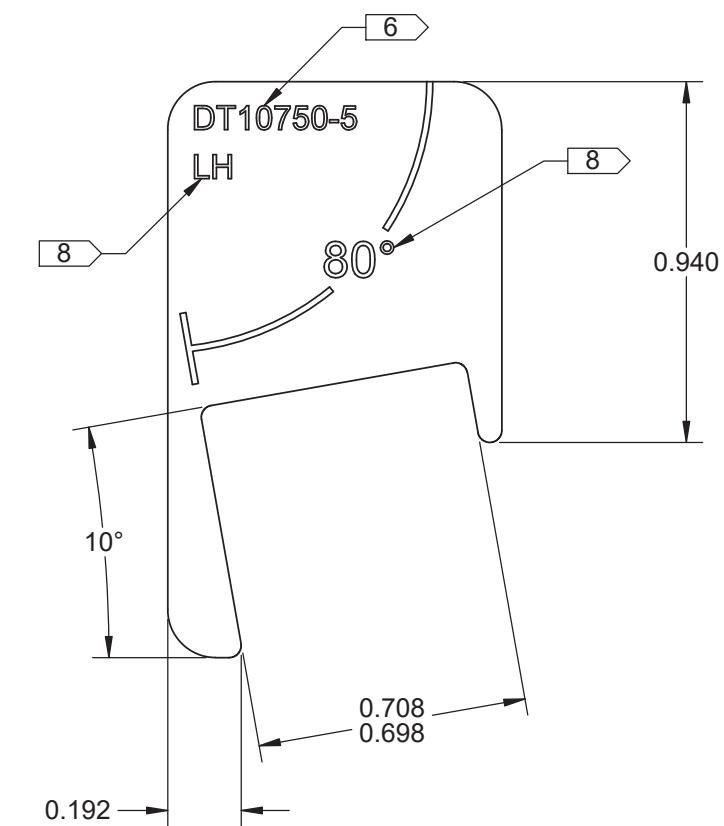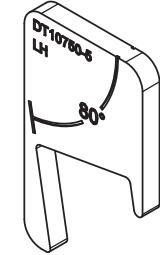

DT10750-5 SIDE PLATE

NOTES:


- 1) MATERIAL: 6061-T6/T62/T651 ALUMINUM SHEET OR PLATE
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027
OR ASTM B209
REF DART SPEC M6061T6S
- 2) FINISH: ANODIZE RED PER MIL-A-8625 TYPE II, CLASS 2
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "DT10750-5" PER DART QSI 044 SECTION 6.3
USE MAX DEPTH OF 0.010 WITH A MIN TOOL RAD OF 0.010
- 7) WEIGHT: N/A
- 8) MACHINE ENGRAVE ANGLE AND LINES PER DART QSI 044 SECTION 6.3
USE MAX DEPTH OF 0.010 WITH MIN TOOL RAD OF 0.010

RELEASED
21.08.05 ZF

APPROVED

DESIGN	KPT	DART AEROSPACE LTD
DRAWN	OS	HAWKESBURY, ONTARIO, CANADA
CHECKED	JC	DRAWING NO.
MFG. APPR.	DD	REV. C
APPROVED		DT10750
DE APPR.	N/A	SHEET 3 OF 4
DATE	21.04.07	TITLE
		ANGLED GAUGE ADAPTER POSITIONING TOOL
		NTS
		COPYRIGHT © 2020 BY DART AEROSPACE LTD
		THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
		NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT
		WRITTEN PERMISSION FROM DART AEROSPACE LTD.

8 7 6 5 4 3 2 1

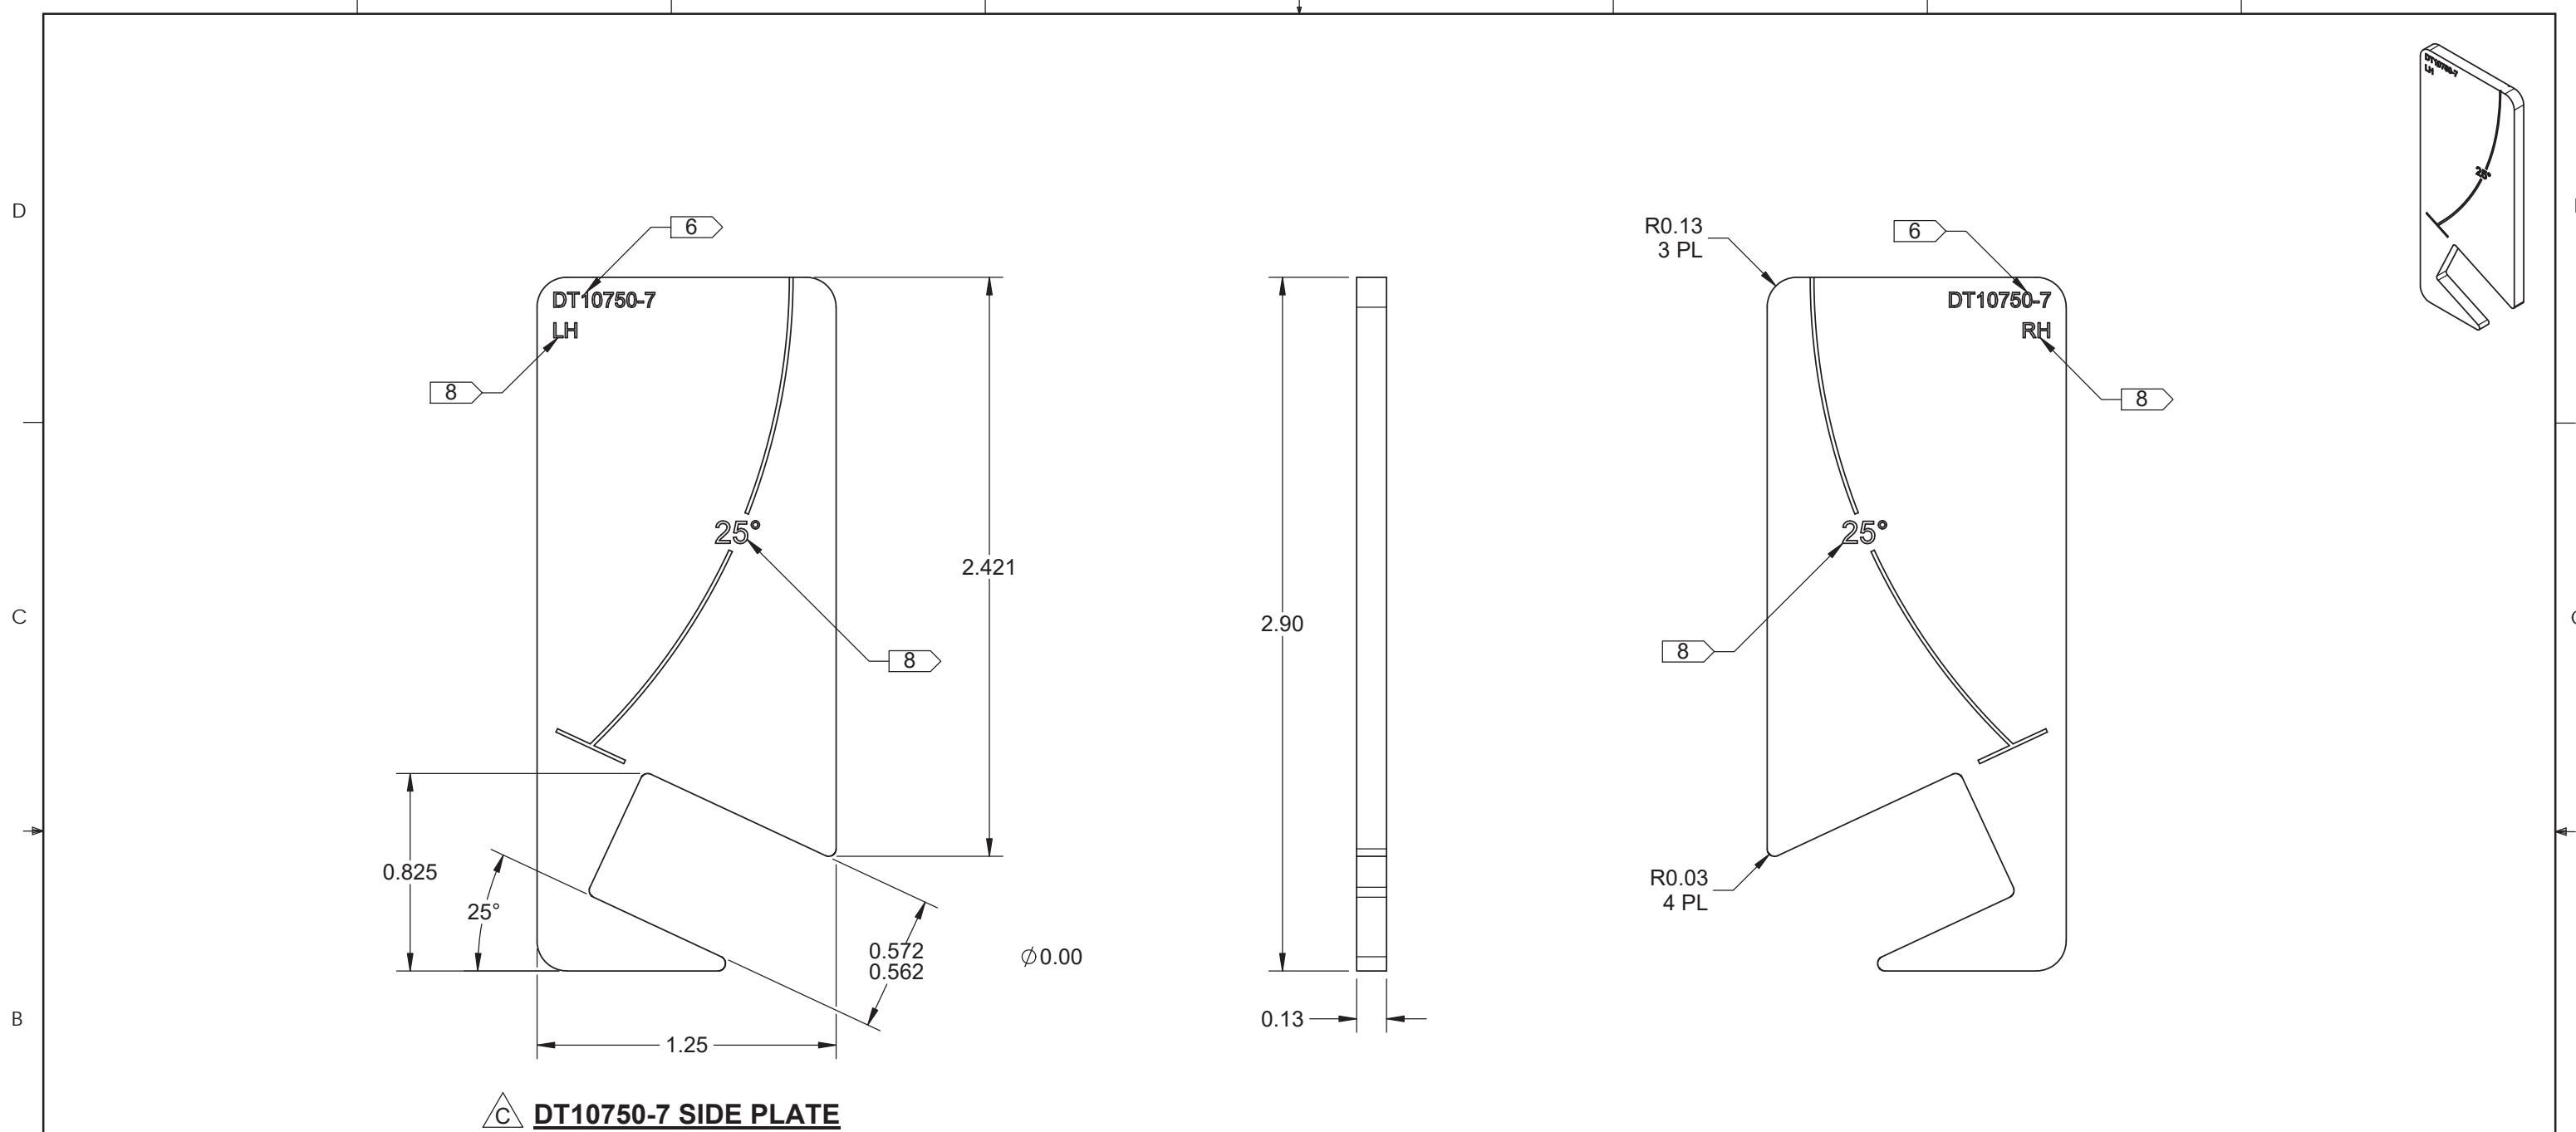

DT10750-7 SIDE PLATE

NOTES:

- 1) MATERIAL: 6061-T6/T62/T651 ALUMINUM SHEET OR PLATE
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027
OR ASTM B209
REF DART SPEC M6061T6S
- 2) FINISH: ANODIZE RED PER MIL-A-8625 TYPE II, CLASS 2
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "DT10750-7" PER DART QSI 044 SECTION 6.3
USE MAX DEPTH OF 0.010 WITH A MIN TOOL RAD OF 0.010
- 7) WEIGHT: N/A
- 8) MACHINE ENGRAVE ANGLE AND LINES PER DART QSI 044 SECTION 6.3
USE MAX DEPTH OF 0.010 WITH MIN TOOL RAD OF 0.010

RELEASED
21.08.05 ZF

APPROVED

RELEASER
21.08.05 ZF

DESIGN	KPT	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA
DRAWN	OS	
CHECKED	JC	
MFG. APPR.	DD	
APPROVED		
DE APPR.	N/A	
DRAWING NO.	REV. C	
DT10750	SHEET 4 OF 4	
TITLE	SCALE	
ANGLED GAUGE ADAPTER POSITIONING TOOL	NTS	
DATE	21.04.07	

COPYRIGHT © 2020 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT
WRITTEN PERMISSION FROM DART AEROSPACE LTD.